


Railway Lifting Jacks 20 Ton




SCM
SCM200F.4

TECHNICAL CHARACTERISTICS




Capacity per jack	Ton	20
Minimum height of the anvil	mm	350
Lifting stroke	mm	2.000
Maximum height of the anvil	mm	2.350
Operating voltage	Volt/Hz	380-400-415/50
Minimal protection	IP	54
Length of the interconnecting cable	m	25

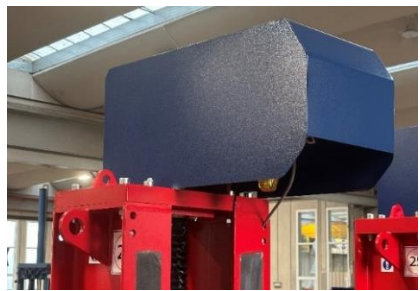MANUAL MECHANICAL TRANSLATOR Individual capacity.....Ton 20 Stroke.....mm $\pm$ 50	
METALLIC COVER for the protection of the motoreducer on each jack.	

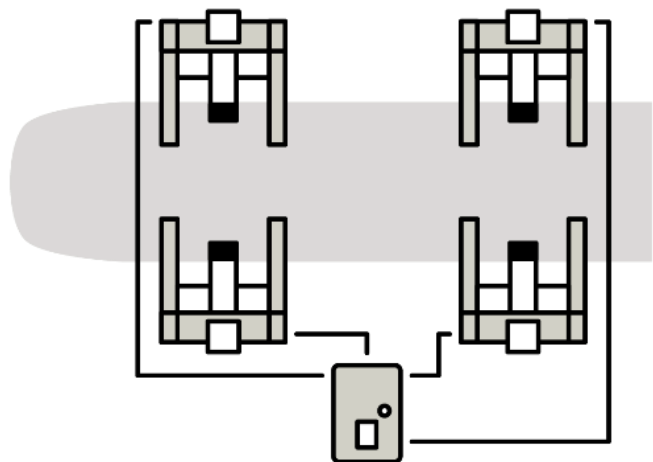

DIMENSIONAL DRAWINGS


SCM200F

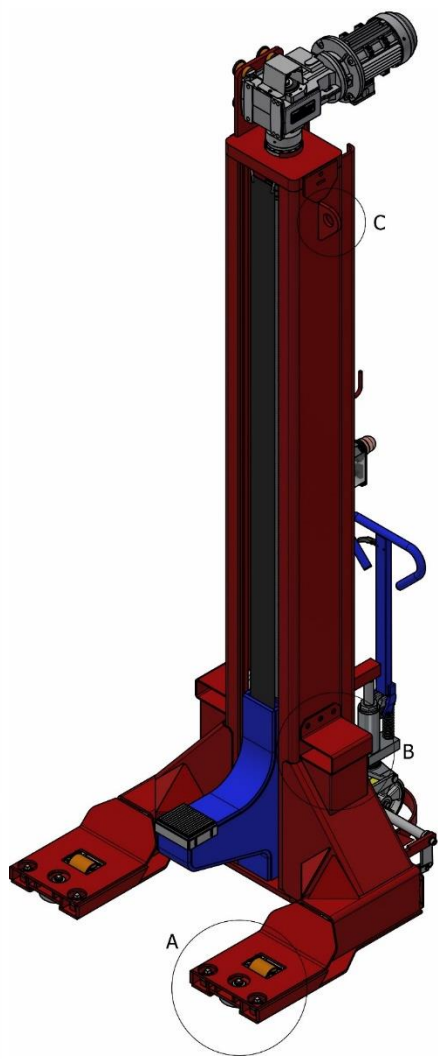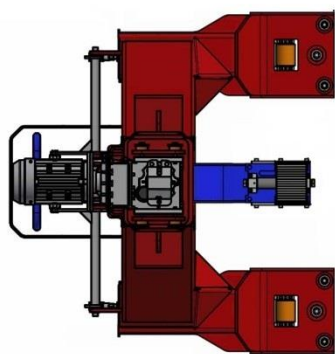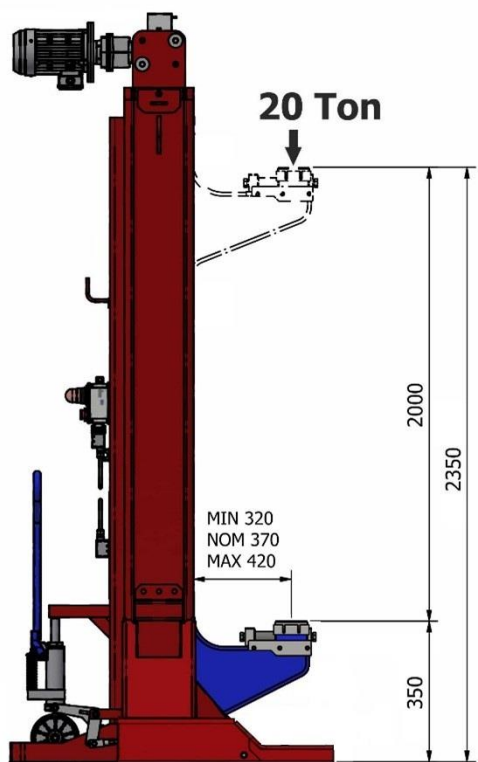

C
GOLFARE PER SOLLEVAMENTO E
TRASPORTO CON CARROPONTE /
HOOKS FOR LIFTING AND
MOVING BY A CRANE



B
PRESE PER MULETTI /
"VENT HOLES-POCKETS"
FOR TRANSPORT WITH
FORKLIFT



A
STABILIZZATORE /
STABILIZER

